

# RD15BF.1.N系列 - 半封闭内侧打开

## Series of RD15BF.1.N Semi-enclosed type interior opening



闭合状态：  
Opening type:

- Q** 桥式  
Bridge type
- F** 全封闭式  
Enclosed
- BF** 半封闭式  
Semi-enclosed

注：无字母为普通型  
Note: blank means general type

打开方式：  
Opening way:


- B** 不可打开  
Non-opening
- S** 双侧打开  
Open of both side
- W** 外侧打开  
Exterior opening
- N** 内侧打开  
Interior opening
- F** 无需打开  
Without opening

款式：  
Style:

- Q.B** 桥式不可打开  
Bridge type non-opening
- Q.N** 桥式内侧开  
Bridge type interior opening
- Q.W** 桥式外侧开  
Bridge type exterior opening
- Q.S** 桥式双侧可打开  
Bridge type both side opening
- BF.B** 半封闭不可开  
Semi-enclosed non-opening
- BF.N** 半封闭内侧开  
Semi-enclosed interior opening
- BF.W** 半封闭外侧开  
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开  
Semi-enclosed both side opening
- F.N** 封闭内侧开  
Enclosed interior opening
- F.W** 封闭外侧开  
Enclosed exterior opening
- F.S** 封闭双侧开  
Enclosed both side opening

接头类型：  
Bracket type:



- X** 斜型接头  
Oblique bracket
- F** 方型接头  
Square bracket



- ◎ The cable chain is low noise and smooth operation. Its tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain can mount pectinate plate to fix cable better. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 12mm or less of cable.

- ◎ 噪音低、运行流畅，测试使用寿命达2千万次
- ◎ 可将拖链内侧挡片打开，方便检查或更换线缆
- ◎ 可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径12毫米以下线缆

### 主要技术参数 Basic technical data

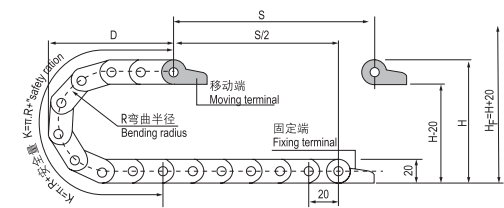

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”  
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

	R	28	38	48
H	76	96	116	
D	58	68	78	
K	140	160	200	

安装实际高度:H<sub>p</sub>=H+20mm(负载0.3kg/m)  
Actual mounting height:H<sub>p</sub>=H+20mm(load 0.3kg/m)

### RD15BF.1.N系列 - 半封闭内侧打开 Series of RD15BF.1.N-Semi-enclosed type interior opening

示意图 Drawing




选配区 Accessories table



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							代号 No.
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance					
RD15BF.1.15N	15	15	20	23	BF.N	28	X <sub>1</sub>	4.2*7L	10		33	6	23	RD15BF.1.15N-XJT
RD15BF.1.20N	15	20	20	29	BF.N	28,38	X <sub>1</sub>	3.2	8		30	7	29	RD15BF.1.20N-XJT
RD15BF.1.30N	15	30	20	39	BF.N	28,38,48	X <sub>2</sub>	4.2*7L		15	30	8	39	RD15BF.1.30N-XJT
RD15BF.1.40N	15	40	20	49	BF.N	28,38,48	X <sub>3</sub>	4.2*7L	7	28	30	7	49	RD15BF.1.40N-XJT
RD15BF.1.50N	15	50	20	59	BF.N	28,38,48	X <sub>3</sub>	4.2*7L	7	37	30	7	59	RD15BF.1.50N-XJT

注：N表示内侧打开  
Note: N indicates that the interior opening

### 固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

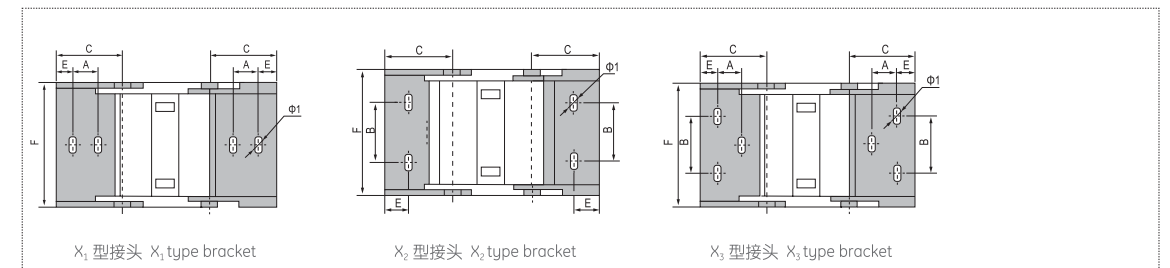

### 订货示例 Order Sample

示例 拖链内高15mm、内宽15mm、半径28mm、长度1米/50节 (Sample: inner height 15mm, inner width 15mm, radius 28mm, length 50 links/1 meter)

拖链 Chain RD15BF.1.15N R28 1000mm/50 Links

接头 Bracket RD15BF.1.15N-XJT 副 (Set)

配件 Accessories

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.